


UGRF

QUICK INSTALLATION

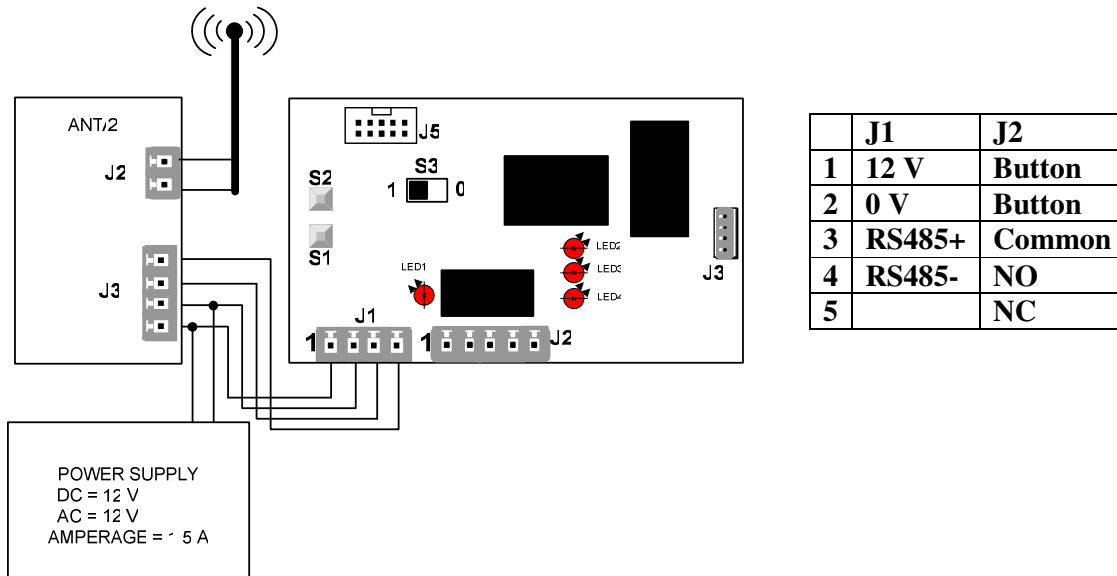

For the UGRF installation, take with you a programmed transmitter. The transmitter must be pre-programmed with the help of the « LAGUNE RF » software.

PROCEDURE

Reset of the unit control:

Set the S3 switch to position 1, then press both S2 and S1 until the hearing of 2 beeps.
Set the S3 switch back to position O.

Programming:

Leave the S3 switch in position O
Press one of the transmitter's buttons (radio cover zone)
You must hear 2 beeps. The site code and the opening temporization are validated.
Your UGRF is now ready.

Optional:

You can program the opening temporization manually

Opening temporization adjustment (Example shown for 15 seconds setup):

Leave the S3 switch in position O, then press 5 times on S1 (second unit) and 1 time on S2 (about ten seconds).
You must hear two beeps to take the temporization number into effect.